>> RP-MGT1000

1000Base-T Mini Ethernet copper module

The Copper Small Form Pluggable (SFP) transceivers high performance, cost effective module compliant with the Gigabit Ethernet and 1000- BASE-T standards as specified in IEEE 802. 3-2002 and IEEE 802.3ab, which



supporting 1000Mbps data-rate up to 100 meters reach over unshielded twisted-pair category 5 cable. The module supports 1000 Mbps full duplex data-links with 5-level Pulse Amplitude Modulation (PAM) signals. The module provides standard serial ID information compliant with SFP MSA, which can be accessed with address of A0h via the 2wire serial CMOS EEPROM protocol. The physical IC can also be accessed via 2wire serial bus at address ACh.

Feature

- Up to 1.25Gb/s bi-directional data links
- Hot-pluggable SFP footprint
- Extended case temperature range (0°C to 70°C)
- Fully metallic enclosure for low EMI
- Low power dissipation (1.05 W typical)
- Compact RJ-45 connector assembly
- Access to physical layer IC via 2-wire serial bus
- 1000 Mbps operation in host systems with SERDES interface
- Gigabit Ethernet over Cat 5 cable
- Compatible with IEEE 802.3z
- Compatible with FDA 21 CFR 1040.10 and 1040.11, Class I


1.SFP to Host Connector Pin Out

| Pin | Symbol | Name/Description | Note |
|-----|-------------|---|------|
| 1 | VEET | Transmitter ground (common with receiver ground) | 1 |
| 2 | TFAULT | Transmitter Fault. Not supported | |
| 3 | TDIS | Transmitter Disable. PHY disabled on high or open | 2 |
| 4 | MOD DEF(2) | Module Definition 2. Data line for serial ID | 3 |
| 5 | MOD DEF(1) | Module Definition 1. Clock line for serial ID | 3 |
| 6 | MOD DEF(0) | Module Definition 0. Grounded within the module | 3 |
| 7 | Rate Select | No connection required | |
| 8 | LOS | Loss of Signal indication. | 4 |
| 9 | VEER | Receiver ground (common with transmitter ground) | 1 |
| 10 | VEER | Receiver ground (common with transmitter ground) | 1 |
| 11 | VEER | Receiver ground (common with transmitter ground) | 1 |
| 12 | RD- | Receiver Inverted DATA out. AC coupled | |
| 13 | RD+ | Receiver Non-inverted DATA out. AC coupled | |
| 14 | VEER | Receiver ground (common with transmitter ground) | 1 |
| 15 | VCCR | Receiver power supply | |
| 16 | VCCT | Transmitter power supply | |
| 17 | VEET | Transmitter ground (common with receiver ground) | 1 |
| 18 | TD+ | Transmitter Non-Inverted DATA in. AC coupled | |
| 19 | TD- | Transmitter Inverted DATA in. AC coupled | |
| 20 | VEET | Transmitter ground (common with receiver ground) | 1 |

Notes: 1. Circuit ground is connected to chassis ground

- 2. PHY disabled on TDIS > 2.0V or open, enabled on TDIS < 0.8V
- 3. Should be pulled up with 4.7k 10k Ohms on host board to a voltage between 2.0 V and 3.6 V.MOD_DEF(0) pulls line low to indicate module is plugged in.
- 4. LVTTL compatible with a maximum voltage of 2.5V. Not supported on SFP-TX.

Table 1. SFP to host connector pin assignments and descriptions

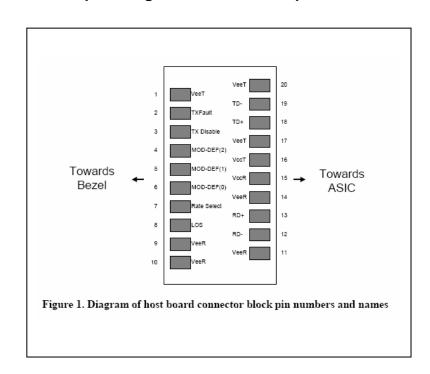

II. +3.3V Volt Electrical Power Interface

The SFP-TX has an input voltage range of 3.3 V +/- 5%. The 4 V maximum voltage is not allowed for continuous operation.

| +3.3 Volt Electrical Power Interface | | | | | | | | | | | |
|--------------------------------------|--------|------|-----|------|-------|--|--|--|--|--|--|
| Parameter | Symbol | Min | Тур | Max | Units | Notes/Conditions | | | | | |
| Supply Current | ls | | 320 | 375 | mA | 1.2W max power over full range of voltage and temperature. See caution note below | | | | | |
| Input Voltage | Vcc | 3.13 | 3.3 | 3.47 | V | Referenced to GND | | | | | |
| Maximum Voltage | Vmax | | | 4 | V | | | | | | |
| Surge Current | Isurge | | | 30 | mA | Hot plug above steady state current. See caution note below | | | | | |

Caution: Power consumption and surge current are higher than the specified values in the SFP MSA

Table 2. +3.3 Volt electrical power interface

III. Low-Speed Signals

MOD_DEF(1) (SCL) and MOD_DEF(2) (SDA), are open drain CMOS signals (see section VII, "Serial Communication Protocol"). Both MOD_DEF(1) and MOD_DEF(2) must be pulled up to host_Vcc.

| Low-Speed Signals, Electronic Characteristics | | | | | | | | | | |
|---|--------|-------------------|----------------|-------|---|--|--|--|--|--|
| Parameter | Symbol | Min | Max | Units | Notes/Conditions | | | | | |
| SFP Output LOW | VOL | 0 | 0.5 | V | 4.7k to 10k pull-up to host_Vcc, measured at host side of connector | | | | | |
| SFP Output HIGH | VOH | host_Vcc - 0.5 | host_Vcc + 0.3 | V | 4.7k to 10k pull-up to host_Vcc, measured at host side of connector | | | | | |
| SFP Input LOW | VIL | 0 | 0.8 | V | 4.7k to 10k pull-up to Vcc, measured at SFP side of connector | | | | | |
| SFP Input HIGH | VIH | 2 | Vcc + 0.3 | V | 4.7k to 10k pull-up to Vcc, measured at SFP side of connector | | | | | |

Table 3. Low-speed signals, electronic characteristics

IV. High-Speed Electrical Interface

All high-speed signals are AC-coupled internally.

| High-Speed Electrical Interface, Transmission Line-SFP | | | | | | | | | |
|--|---------|--|-----|--|-----|---|--|--|--|
| Parameter Symbol Min Typ Max Units Notes/Conditions | | | | | | | | | |
| Line Frequency | fL | | 125 | | MHz | 5-level encoding, per IEEE 802.3 | | | |
| Tx Output Impedance | Zout,TX | | 100 | | Ohm | Differential, for all Frequencies between 1MHz and 125MHz | | | |

| Rx Input Impedance | Zin,RX | | 100 | | Ohm | Differential, for all Frequencies Between 1MHz and 125MHz |
|--------------------|--------|--|-----|--|-----|---|
|--------------------|--------|--|-----|--|-----|---|

Table 4. High-speed electrical interface, transmission line-SFP

| High-Speed Electrical Interface, Host-SFP | | | | | | | | | | |
|---|----------|-----|-----|------|-------|------------------|--|--|--|--|
| Parameter | Svmbol | Min | qvT | Max | Units | Notes/Conditions | | | | |
| Single ended data input swing | Vinsing | 250 | | 1200 | mV | Single ended | | | | |
| Single ended data output swing | Voutsing | 350 | | 800 | mV | Single ended | | | | |
| Rise/Fall Time | Tr,Tf | | 175 | | psec | 20%-80% | | | | |
| Tx Input Impedance | Zin | | 50 | | Ohm | Single ended | | | | |
| Rx Output Impedance | Zout | | 50 | | Ohm | Single ended | | | | |

Table 5. High-speed electrical interface, host-SFP

V. General Specifications

| General | | | | | | | | | | | |
|--------------|--------|-----|-----|-------|--------|--|--|--|--|--|--|
| Parameter | Symbol | Min | Тур | Max | Units | Notes/Conditions | | | | | |
| Data Rate | BR | 10 | | 1,000 | Mb/sec | IEEE 802.3 compatible. See Notes 2 through 4 below | | | | | |
| Cable Length | L | | | 100 | m | Category 5 UTP. BER <10-12 | | | | | |

Table 6. General specifications

Notes:

- 1. Clock tolerance is +/- 50 ppm
- 2. By default, the SFP-TX is a full duplex device in preferred master mode
- 3. Automatic crossover detection is enabled. External crossover cable is not required
- 4. 1000 BASE-T operation requires the host system to have an SGMII interface with no clocks, and the module PHY to be configured per Application Note AN-2036. With a SERDES that does not support SGMII, the module will operate at 1000BASE-T only.

VI. Environmental Specifications


The SFP-TX has an extended range from 0°C to +85°C case temperature as specified in Table 8.

| Environmental Specifications | | | | | | | | | | |
|------------------------------|--------|-----|-----|-----|-------|---------------------|--|--|--|--|
| Parameter | Symbol | Min | Тур | Max | Units | Notes/Conditions | | | | |
| Operating Temperature | Тор | 0 | | 85 | °C | Case temperature | | | | |
| Storage Temperature | Tsto | -40 | | 85 | °C | Ambient temperature | | | | |

Table 7. Environmental specifications

VII. Mechanical Specifications

The host-side of the SFP-TX conforms to the mechanical specifications outlined in the SFP MSA1. The front portion of the SFP (part extending beyond the face plate of the host) is larger to accommodate the RJ-45 connector. See Figure 2 below for details.

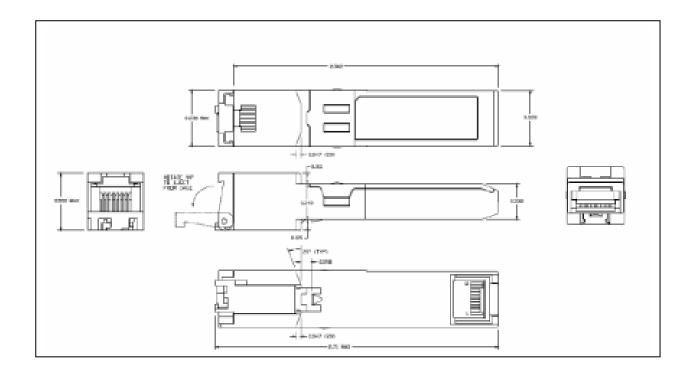

VIII. References

- 1. Small Form Factor Pluggable (SFP) Transceiver Multi-Source Agreement (MSA),
- 2. IEEE Std 802.3, 2002 Edition. IEEE Standards Department, 2002.
- 3. "AT24C01A/02/04/08/16 2-Wire Serial CMOS E2PROM", Atmel Corporation.

Ordering information MOD-MGT1000 1-P 1000Base-T Mini Ethernet copper module, 1.25Gbps, 3.3v